

BLOCK BATTERIES WITH GRID PLATES MARATHON CLASSIC FF RANGE

Range FF

The FF range* is suitable for mobile elevating work platforms, cleaning machines, leisure and many other Motive Power applications because of its good high-rate discharge capability.

Main technical features and benefits:

- Vented batteries with positive flat (grid) plates
- Good high-rate discharge capability
- 300 cycles according to IEC 60254-1

* GNB® Industrial Power as your partner for system solutions also offers optimised chargers for these blocks.





Technical characteristics and data

Type	Nominal voltage V	Nominal capacity C ₅ (30 °C) Ah	Nominal capacity C ₂₀ (30 °C) Ah	Length (l) max. mm	Width (b/w) max. mm	Height (h) max. mm	Weight* kg	Terminal	Terminal position
FF 06 187 L	6	187	232	260	181	286	28.0	A- / WNT-Terminal	1
FF 06 200 1	6	200	235	246	190	272	32.0	A-Terminal	1
FF 06 200 2	6	200	235	265	184	269	29.0	A-Terminal	1
FF 06 255	6	255	285	313	184	355	49.0	A-Terminal	1
FF 06 297 L	6	297	385	302	181	425	50.0	A- / WNT-Terminal	1
FF 08 147 K	8	147	183	260	181	286	30.4	WNT-Terminal	2
FF 12 040	12	40.0	50.0	210	175	190	13.7	A-Terminal	3
FF 12 050	12	50.0	62.0	242	175	190	17.3	A-Terminal	3
FF 12 060	12	60.0	75.0	278	175	190	20.7	A-Terminal	3
FF 12 080 1	12	80.0	100	353	175	190	26.4	A-Terminal	3
FF 12 080 2	12	80.0	100	349	175	235	29.2	A-Terminal	3
FF 12 085	12	85.0	110	328	174	216	27.0	A-Terminal	2
FF 12 105	12	105	125	513	189	223	34.5	A-Terminal	4
FF 12 110	12	110	130	349	175	285	32.0	A-Terminal	3
FF 12 135	12	135	180	513	223	223	47.8	A-Terminal	4
FF 12 158 L	12	158	200	397	179	378	49.4	A- / WNT-Terminal	3

* The weights may exhibit a tolerance of +/-5%

Drawings with terminal position, terminal and torque

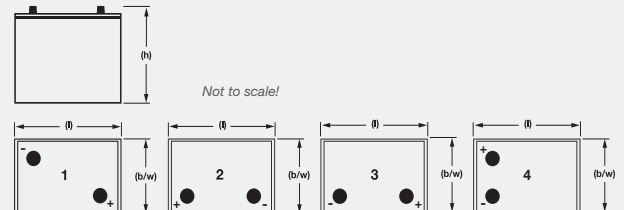

Specifications

